


可撓部長さ(チューブ長)

繰返し動き(軸直角方向変位)が発生し取付面間が拘束されていない場合

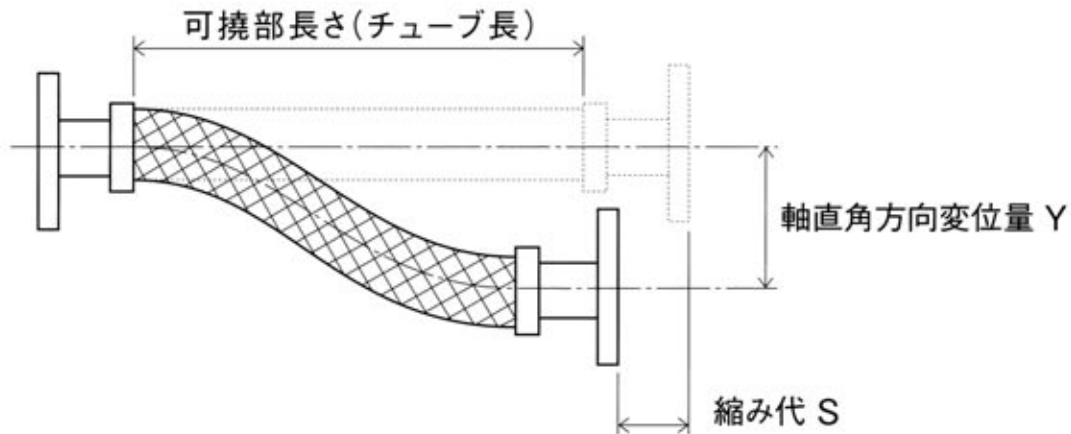

可撓部長さ(チューブ長)に対する軸直角方向変位量の目安

単位: mm

口径	最小 曲げ半径	軸直角方向変位量 Y (縮み代 S)	可撓部長さ(チューブ長)													
			200	300	400	500	600	700	800	900	1000	1200	1400	1600	1800	2000
8A	120	Y	78	143	190	238	286	334	381	429	477	572	668	763	859	954
		(S)	(22)	(51)	(69)	(86)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
10A	150	Y	64	137	190	238	286	334	381	429	477	572	668	763	859	954
		(S)	(14)	(47)	(69)	(86)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
15A	155	Y	64	134	190	238	286	334	381	429	477	572	668	763	859	954
		(S)	(13)	(44)	(69)	(86)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
20A	215	Y	45	100	173	238	286	334	381	429	477	572	668	763	859	954
		(S)	(7)	(23)	(55)	(86)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
25A	220	Y	44	98	169	238	286	334	381	429	477	572	668	763	859	954
		(S)	(6)	(22)	(52)	(86)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
32A	240	Y	41	90	157	237	286	334	381	429	477	572	668	763	859	954
		(S)	(5)	(19)	(44)	(85)	(103)	(121)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
40A	335	Y	29	66	115	178	251	333	381	429	477	572	668	763	859	954
		(S)	(2)	(9)	(23)	(45)	(77)	(120)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
50A	450	Y	22	49	87	135	192	258	332	413	477	572	668	763	859	954
		(S)	(1)	(5)	(13)	(25)	(43)	(68)	(101)	(142)	(173)	(207)	(242)	(276)	(311)	(346)
65A	460	Y	21	48	85	132	188	253	326	406	477	572	668	763	859	954
		(S)	(1)	(5)	(12)	(24)	(41)	(65)	(97)	(136)	(173)	(207)	(242)	(276)	(311)	(346)
80A	355	Y	27	62	109	168	238	318	381	429	477	572	668	763	859	954
		(S)	(2)	(8)	(20)	(40)	(68)	(108)	(138)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
100A	425	Y	23	52	92	142	203	272	349	429	477	572	668	763	859	954
		(S)	(1)	(6)	(14)	(28)	(48)	(76)	(112)	(155)	(173)	(207)	(242)	(276)	(311)	(346)
125A	570	Y	17	39	69	107	154	208	269	337	411	572	668	763	859	954
		(S)	(1)	(3)	(8)	(15)	(27)	(43)	(64)	(90)	(123)	(207)	(242)	(276)	(311)	(346)
150A	660	Y	15	33	60	93	134	181	235	295	361	508	668	763	859	954
		(S)	(0)	(2)	(6)	(11)	(20)	(32)	(48)	(68)	(92)	(158)	(242)	(276)	(311)	(346)
200A	850	Y	11	26	46	73	104	142	184	232	285	406	544	698	859	954
		(S)	(0)	(1)	(3)	(7)	(12)	(19)	(29)	(41)	(56)	(97)	(152)	(225)	(311)	(346)
250A	1000	Y	9	22	39	62	89	121	157	199	244	349	470	606	756	919
		(S)	(0)	(1)	(2)	(5)	(8)	(14)	(21)	(30)	(41)	(70)	(111)	(165)	(233)	(317)
300A	1350	Y	7	16	29	46	66	90	117	148	183	262	354	460	578	707
		(S)	(0)	(0)	(1)	(2)	(4)	(7)	(11)	(16)	(22)	(39)	(61)	(92)	(130)	(177)